# MODEL # 3316 SNAP RING PLIERS

## PRODUCT FEATURES

1. This tool is ideal for installing and removing snap rings.
2. Jaws may be mounted to opening excternal snap rings, or compressing internal rings.
3. Angled jaws are ideal for special applications.

## SAFETY WARNING & CAUTIONS

1. KEEP WORK AREA CLEAN. Cluttered areas invite injuries. Do not use tools in damp, wet, or poorly lit locations. Don't expose to rain. Keep work area well lit.
2. KEEP CHILDREN AWAY. Children must never be allowed in the work area. Do not let them handle machines, tools, or equipment.
3. STORE IDLE EQUIPMENT. When not in use, tools must be locked up in a dry location to inhibit rust. Always lock up tools and keep out of reach of children.
4. DO NOT FORCE THE TOOL. It will do the job better and more safely at the rate for which it was intended. Do not use inappropriate attachments in an attempt to exceed the tool's capacities.
5. USE THE RIGHT TOOL FOR THE JOB. Do not use a tool for a purpose for which it was not intended.
6. DRESS PROPERLY Do not wear loose clothing or jewelry, as they can be caught in moving parts. Non-skid footwear is recommended. Wear restrictive hair covering to contain long hair. Always wear appropriate work clothing.
7. DO NOT OVERREACH. Keep proper footing and balance at all times. Do not reach over or across running machines.
8. MAINTAIN TOOLS WITH CARE. Keep tools maintained and clean for better and safer performance.
9. USE THE RIGHT TOOL FOR THE JOB. Do not attempt to force a small tool or attachment to do the work of a larger industrial tool. There are certain applications for which this tool was designed. Do not modify this tool and do not use this tool for a purpose for which it was not intended.

## SPECIAL WARNINGS WHEN USING THIS TOOL

1. Wear appropriate work gloves and safety shoes when handling this tool and heavy items.
2. Do not allow this tool to clamp onto your own or a co-worker's hands or face.
3. Always wear ANSI-approved eye protection when working with snap rings.

See reversed side for operations.

# MODEL # 3316 SNAP RING PLIERS

Option 1. Position the jaws on the upper pins to open externally applied snap rings.

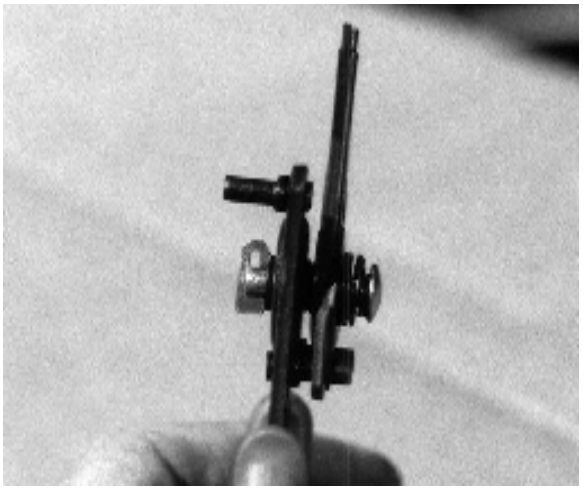

Option 2. Position the jaws on the lower pins to open internally applied snap rings.

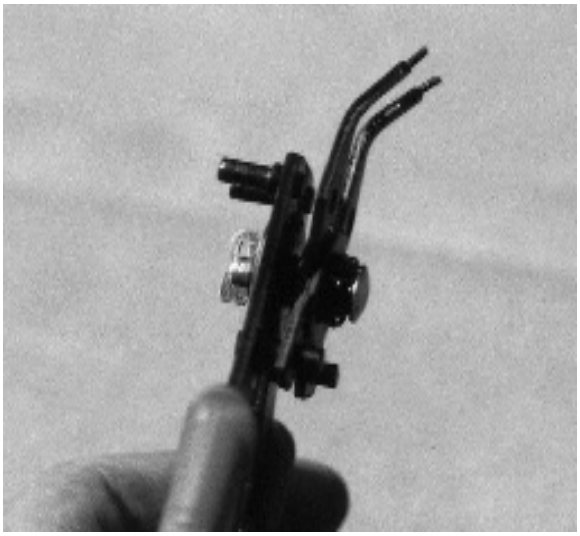

Option 3. Use 45 degree jaws to reach into tight places to install or remove snap rings.

Option 4. Use 90 degree jaws for situations requiring straight-in application of snap ring.

See reversed side for warnings.